


## Model **8901RFK Axiom** Eye/Face Wash & Body Spray No.2080192/1

**NOTE TO INSTALLER:** please leave this information with the maintenance department.

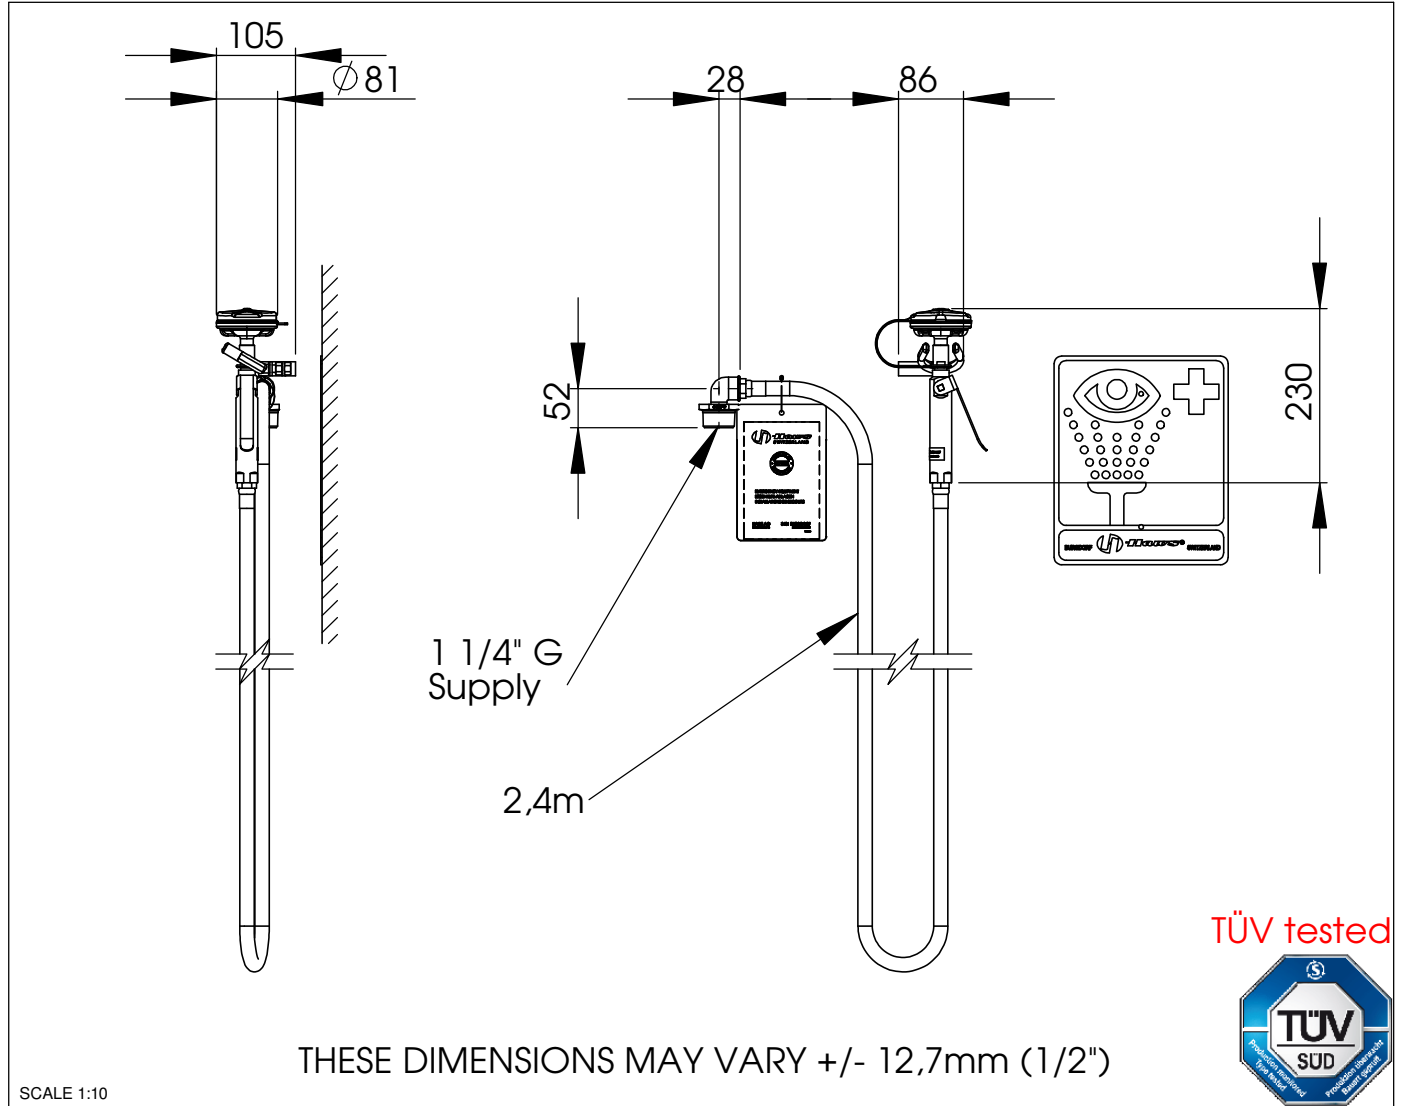

Free access to the eye/facewash & body spray 8901RFK Axiom must be guaranteed at all times. The operator is responsible for the observance of this requirement.

**Model 8901RFK Axion Eye/Face Wash & Body Spray** No.2080192/1

**Shower location:** The eye/facewash & body spray 8901RFK Axion must be installed in the vicinity of potential danger zones. It must be highly visible and easily accessible.

**Connection conduit:** You are recommended to use a 1/2" G conduit, capable of withstanding pressures of 2 - 6BAR (30 - 90PSI). The use of an inlet filter designed to prevent the entry of suspended particles and other impurities is also recommended.

**Water quality:** Eye/facewash & body spray require a supply of drinking water conforming to European standards or their equivalents in other countries.

**Water temperature:** The required water temperature should be determined by the user. The accepted ideal range is 15 - 35°C / 60 - 95°F (but please ensure conformity with local regulations).

**Volum flow:** A minimum flow rate of 6 litres / 1,6 US gallons per minute must be maintained. The eye/facewash & body spray must be capable of delivering this amount of water for at least 15 minutes.

**Connection to plumbing system:** The inlet consists of a 1 1/4" G male-threaded conduit.

**Regular inspection:**

The eye/facewash & body spray 8901RFK Axion should be inspected at weekly intervals. The inspection tag should be dated and signed after each check.

| TROUBLESHOOTING               |   |
|-------------------------------|---|
| Problem                       | Repair-checklist  |
| 1. No flow                    | Check the main shutoff valve.   |
| 2. Insufficient flow of water | <ol style="list-style-type: none"><li>1. Check the line pressure. This should be at least 2BAR / 30PSI (dynamic).</li><li>2. Blocked flow, possibly due to the conduit not being correctly flushed out. Dismantle the spray element, and clean the rubber flow-regulator.</li></ol> |